

Cylinder Accessories

Mounting attachments for standard cylinders ISO 6431


COAP

Front & Rear Flange Mounting, With mounting bolts

Material: steel (Fe 37)

Treatment: White zinc coating

Dimensions: In millimeters

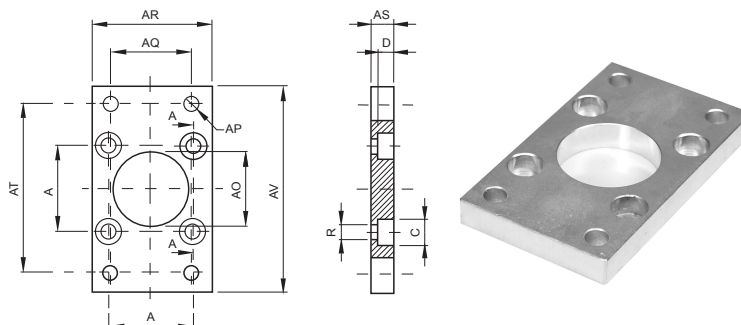


Type	Art. No.	Piston Ø (mm)	A ±0.2	AO H11	AP H13	AQ JS14	AR	AS ±0.2	AT JS14	AV	C	D ±0.2	R	Weight (g)
FFS-32	54401	32	32.5	30	7	32	45	10	64	80	10.5	6.5	6.5	190
FFS-40	54407	40	38	35	9	36	52	10	72	90	10.5	6.5	6.5	246
FFS-50	54413	50	46.5	40	9	45	65	12	90	110	13.5	8.5	8.5	478
FFS-63	54419	63	56.5	45	9	50	75	12	100	120	13.5	8.5	8.5	622
FFS-80	54425	80	72	45	12	63	95	16	126	150	16.5	10.5	10.5	1,430
FFS-100	54431	100	89	55	14	75	115	16	150	170	16.5	10.5	10.5	1,986
FFS-125	54437	125	110	60	16	90	140	20	180	205	20	12.5	13.5	3,750
FFS-160	54443	160	140	65	18	115	180	20	230	260	25	16.5	17	6,350
FFS-200	54448	200	175	75	22	135	220	25	270	300	25	16.5	17	11,350

Angled Bracket Foot Mounting, With mounting bolts

Material: steel (Fe 37)

Treatment: White zinc coating

Dimensions: In millimeters

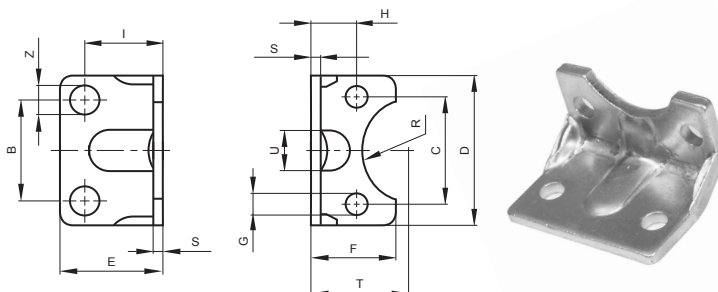

Type	Art. No.	Piston Ø (mm)	B JS14	C ±0.2	D 0 -0.2	E	F +2 0	G H14	H ±0.2	I ±0.2	R H14	S ±0.5	T JS15	U	Z H14	Weight (g)
AFS-32	54402	32	32	32.5	45	35	30	7	15.75	24	15	4	32	11	7	66
AFS-40	54408	40	36	38	52	36	30	7	17	28	17.5	4	36	15	9	78
AFS-50	54414	50	45	46.5	65	47	36	9	21.75	32	20	5	45	16	9	168
AFS-63	54420	63	50	56.5	75	45	35	9	21.75	32	22.5	5	50	18	9	190
AFS-80	54426	80	63	72	95	55	47	11	27	41	22.5	6	63	17	12	382
AFS-100	54432	100	75	89	115	57	53	11	26.5	41	27.5	6	71	24	14	452
AFS-125	54438	125	90	110	140	70	70	14	35	45	30	8	90	-	16	1,090
AFS-160	54444	160	115	140	180	75	100	18	45	60	32.5	9	115	-	18	1,188
AFS-200	54449	200	135	175	220	100	100	18	47.5	70	37.5	12	135	-	22	3,450