


Female Hinge Mounting, With mounting bolts


Material: Die cast aluminum
Dimensions: In millimeters

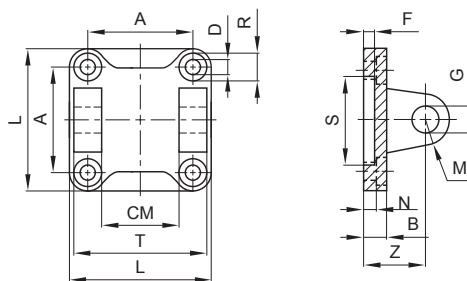

Type	Art. No.	Piston Ø (mm)	A ±0.2	B	CM H14	D H13	F	G H9	L	M max.	N ±0.5	R H13	S H11	T H14	Z ±0.2	Weight (g)
FHS-32	54403	32	32.5	9	26	6.6	5	10	45	10	5.5	11	30	45	22	48
FHS-40	54409	40	38	9	28	6.6	5	12	52	12	5.5	11	35	52	25	75
FHS-50	54415	50	46.5	11	32	9	5	12	65	12	6.5	15	40	60	27	124
FHS-63	54421	63	56.5	11	40	9	5	16	75	16	6.5	15	45	70	32	192
FHS-80	54427	80	72	14	50	11	5	16	95	16	10	18	45	90	36	380
FHS-100	54433	100	89	14	60	11	5	20	115	20	10	18	55	110	41	620
FHS-125	54439	125	110	20	70	14	7	25	140	25	10	20	60	130	50	1,180
FHS-160	54445	160	140	20	90	18	7	30	180	25	10	26	65	170	55	1,780
FHS-200	54450	200	175	25	90	18	7	30	220	25	11	26	75	170	60	2,900

Center Trunion Mounting, With mountings bolts

Material: Steel A105
Dimensions: In millimeters

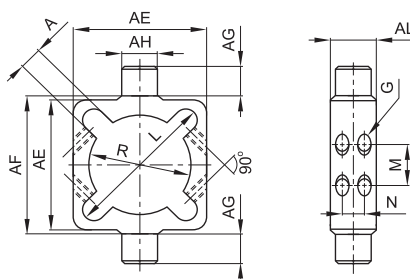

Type	Art. No.	Piston Ø (mm)	A +0.2 0	AE max.	AF h14	AG h14	AH e9	AL max.	G	L ±0.3	M ±0.3	N ±0.3	R ±0.2 0	Weight (g)
CTS-32	54406	32	11	48.5	50	12	12	18	M5	58	13.5	7	37	130
CTS-40	54412	40	11	59	63	16	16	20	M6	67.5	19	8	46	238
CTS-50	54418	50	14	71	75	16	16	20	M6	82.5	24.5	8	56	318
CTS-63	54424	63	14	85	90	20	20	26	M6	97	28	12	69	608
CTS-80	54430	80	16	105	110	20	20	26	M6	120	36.5	12	87	928
CTS-100	54436	100	17	129	132	25	25	32	M8	146.5	42.5	15	107	1,562
CTS-125	54442	125	18	154	160	25	25	33	M8	181	59.5	15	133	2,200